

# SMART DRIVERS Constant Current 12-24W

## TECHNICAL SPECIFICATION

THD <5% @230Vac  
STANDBY POWER <0.5W



**INPUT VOLTAGE**

120Vac - 285Vac @50Hz

**POWER FACTOR**

>0.98 @230Vac

**SURGE IMMUNITY**

>4KV

**OUTPUT VOLTAGE**

9Vdc - 18Vdc

**OUTPUT CURRENT**

300mA, 400mA, 500mA & 600mA  
(Selectable by DIP switch)

**OPERATING TEMPERATURE**

5°C - 45°C

**DIMMING RANGE**

1% - 100%

**MODE OF OPERATION**

Casambi App, Keypad,

**RANGE OF OPERATION** 30

mtrs (LoS) **DIMENSIONS**

**(LXWXH)**

162mm x 43.5mm x 30mm

## ORDERING CODE

To order as per above code kindly select one from each option given below

Output Power	Max dc Output I	No of Channels	Dimming Protocol
12W-24W 12	600mA 600	1 channel 1	CASAMBI BLE Mesh

Powered by

**CASAMBI**

# SMART DRIVERS Constant Current 24-36W

## TECHNICAL SPECIFICATION

THD <5% @230Vac  
STANDBY POWER <0.5W



**INPUT VOLTAGE**

120Vac - 285Vac @50Hz

**POWER FACTOR**

>0.98 @230Vac

**SURGE IMMUNITY**

>4KV

**OUTPUT VOLTAGE**

30Vdc - 42Vdc

**OUTPUT CURRENT**

600mA, 700mA, 800mA & 900mA  
(Selectable by DIP switch)

**OPERATING TEMPERATURE**

5°C - 45°C

**DIMMING RANGE**

1% - 100%

**MODE OF OPERATION**

Casambi App, Keypad

**RANGE OF OPERATION** 30

mtrs (LoS)

**DIMENSIONS (LXWXH)**

162mm x 43.5mm x 30mm

## ORDERING CODE

To order as per above code kindly select one from each option given below

Output Power	Max dc Output I	No of Channels	Dimming Protocol
24W-36W 15	900mA 900	1 channel 1	CASAMBI BLE Mesh

Powered by


**CASAMBI**

# SMART DRIVERS

## Constant Current 24-40W

### TECHNICAL SPECIFICATION

THD <5% @230Vac  
STANDBY POWER <0.5W

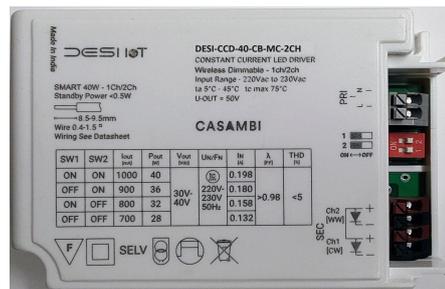

**INPUT VOLTAGE**

120Vac - 285Vac @50Hz

**POWER FACTOR**

>0.98 @230Vac

**SURGE IMMUNITY**

>4KV

**OUTPUT VOLTAGE**

30Vdc - 40Vdc

**OUTPUT CURRENT**

700mA, 800mA, 900mA & 1000mA  
(Selectable by DIP switch)

**OPERATING TEMPERATURE**

5°C - 45°C

**DIMMING RANGE**

1% - 100%

**MODE OF OPERATION**

Casambi App., Keypad

**RANGE OF OPERATION**

30 mtrs (LoS)

**DIMENSIONS (LXWXH)**

103.5mm X 67.5mm X 30mm

### ORDERING CODE

To order as per above code kindly select one from each option given below

Output Power	Max dc Output I	No of Channels	Dimming Protocol
24W-40W 40	1000mA 1000	1 channel 1	CASAMBI BLE Mesh